

Screen Repair Walkthrough



-
- **Step 1 ~ calls for the removal of the screws located by the bottom of the frame**
 - **Step 2- 12 ~ Heat the glass to loosen the adhesive on the glass in order to gently pry the device open**




Step 10



*Pry around the edges until the screen is separated, then slowly lift

Step 13 Display Assembly

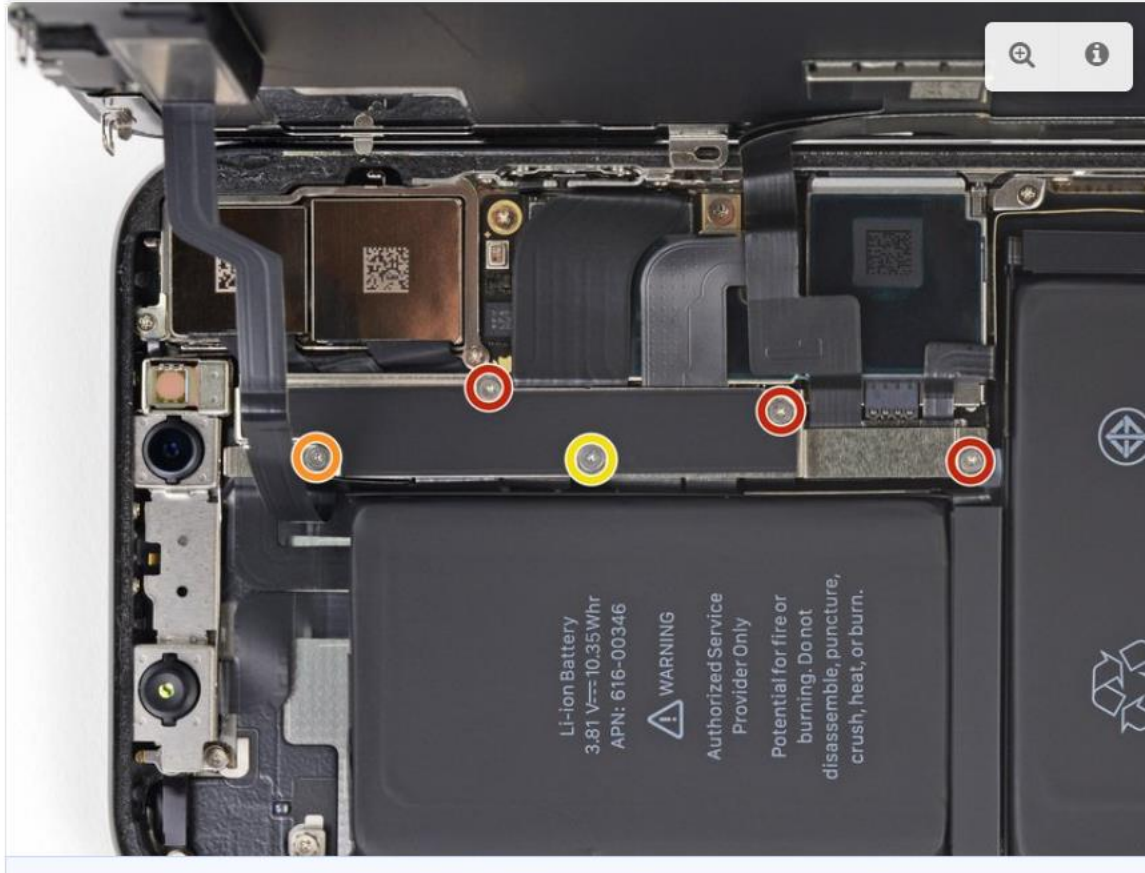

Step 13- 20 ~
Remove the screws holding down the bracket

Remove the ribbons from connectors carefully and proceed to remove the screen

Step 15





**Step 20 ~
Screen, LCD, and
Digitizer is removed from
the frame**

Step 24



**We are now removing the earpiece,
microphone and the proximity sensor so
that it can be transferred to the NEW
screen**



**This is the screws, bracket,
Camera, ribbon and sensor
position on my workstation.**

Along with the tools I have uses.

**These will all go onto the new
screen.**

Step 24-30 ~

From this point we begin to work backwards and put the device back together.

Following the guide from bottom to top.



We Are Done! The Before Vs After

